

SOPRA TPE CHAMFER

TECHNICAL DATA SHEET

ANZ-TDS-147-SOPRA TPE CHAMFER



ACCESSORY
PRODUCTS

APPLICATIONS

ROOFS

FOUNDATIONS

DESCRIPTION

SOPRA TPE CHAMFER is used to eliminate the angle of 90° during laying of bituminous membranes between horizontal plane and vertical walls.

SOPRA TPE CHAMFER are fully compatible with both APP and SBS-modified bituminous membranes.




APPLICATION

- SOPRA TPE CHAMFER is laid along the perimeter under two layers of SOPREMA bitumen membranes for long term performance of the system. To improve adhesion, a thin coat of primer can be applied on. Close to angles and next to drains SOPRA TPE CHAMFER must be cut at 45°.
- SOPRA TPE CHAMFER is compatible with all the accessories and membrane in the Soprema bitumen range.

FOR COMPLETE INFORMATION ON PRODUCT INSTALLATION, PLEASE CONSULT YOUR SOPREMA REPRESENTATIVE.

PROPERTIES

SPECIFICATIONS	SOPRA TPE CHAMFER			
	A	B	L	PCS PER BOX
SOPRA TPE CHAMFER	43	60	1100	30

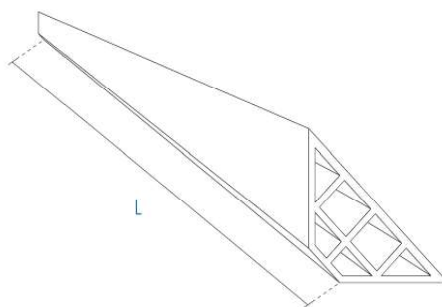

STORAGE AND HANDLING

If the SOPRA TPE CHAMFER are stored outdoors, cover them with an opaque protection cover after removal of the delivery packaging.

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this publication is based on the present state of our best knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by Commonwealth or State Legislation. The owner, their representative and/or the contractor are responsible for checking the suitability of products for their intended use.



SOPREMA.COM.AU • +61 (3) 9221 6230

NOTE : All products manufactured by SOPREMA Inc. comply with the description and properties indicated in the technical data sheet that was current at the date of manufacture.