

SOPRA TPE WALL OUTLET 45



ACCESSORY
PRODUCTS

APPLICATIONS

ROOFS

TECHNICAL DATA SHEET

ANZ-TDS-94-SOPRA TPE WALL OUTLET 45

DESCRIPTION

SOPRA TPE WALL OUTLET 45 is designed to connect the SOPREMA bituminous waterproofing membranes to the rainwater drains positioned close to parapet walls.

SOPRA TPE WALL OUTLET 45 they can be positioned both horizontally or vertically.

The special 45° shape of the flange is suitable for screeds with an angle fillet rather than a 90° corner.

The wide ribbed flange ensures perfect adhesion with the SOPREMA bituminous waterproofing membranes and the 427 mm long spigot, you can pass through walls as thick as 40 cm.

SOPRA TPE WALL OUTLET 45 provides excellent resistance to deterioration caused by the sun, ozone and other weather agents or chemicals normally found in the atmosphere.

The elasticity of the material allows for excellent flexibility even at low temperatures, which ensures mechanical and physical properties are maintained over time.


APPLICATION

- SOPRA TPE WALL OUTLET 45 is installed between two layers of SOPREMA bitumen membranes for long term performance of the system. To improve adhesion, a thin coat of primer can be applied on SOPRA TPE WALL OUTLET 45 beforehand.

FOR COMPLETE INFORMATION ON PRODUCT INSTALLATION, PLEASE CONSULT YOUR SOPREMA REPRESENTATIVE.

PROPERTIES

SPECIFICATIONS	SOPRA TPE WALL OUTLET 45						
	A	B	C	D	E	F	PCS PER BOX
SOPRA TPE WALL OUTLET45 65x100/45	65 mm	100 mm	427 mm	140 mm	150 mm	310 mm	10
SOPRA TPE WALL OUTLET45 100x100/45	100 mm	100 mm	427 mm	140 mm	150 mm	310 mm	10

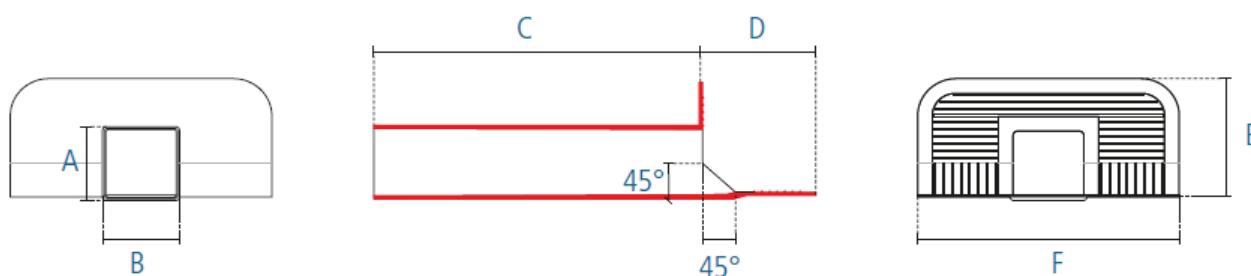

SOPREMA.COM.AU • +61 (3) 9221 6230

SOPRA TPE

WALL OUTLET 45

TECHNICAL DATA SHEET


ANZ-TDS-94-SOPRA TPE WALL OUTLET45



ACCESSORY
PRODUCTS

APPLICATIONS

ROOFS

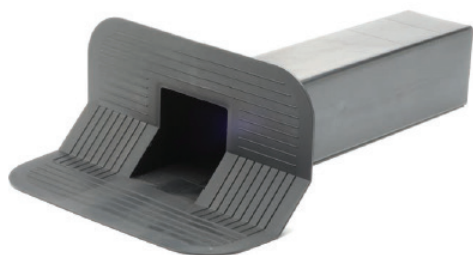

STORAGE AND HANDLING

If the products are stored outdoors, cover them with an opaque protection cover after removal of the delivery packaging.

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this publication is based on the present state of our best knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by Commonwealth or State Legislation. The owner, their representative and/or the contractor are responsible for checking the suitability of products for their intended use.



SOPREMA.COM.AU • +61 (3) 9221 6230

TDS_SOPRA_TPE_WALL_OUTLET_45_2021_RA

2/2