



ACCESSORY
PRODUCTS

APPLICATIONS

ROOFS

SOPRA TPE ROUND WALL OUTLET

TECHNICAL DATA SHEET

ANZ-TDS-144-SOPRA TPE ROUND WALL OUTLET

DESCRIPTION

SOPRA TPE ROUND WALL OUTLET is designed to connect the SOPREMA bituminous waterproofing membranes to the rainwater drains positioned close to parapet walls.

SOPRA TPE ROUND WALL OUTLET they can be positioned both horizontally or vertically.

The shape of the flange is suitable for screeds with 90° corner.

The wide ribbed flange ensures perfect adhesion with the SOPREMA bituminous waterproofing membranes and the 500 mm long spigot, you can pass through walls as thick as 40 cm.

SOPRA TPE ROUND WALL OUTLET provides excellent resistance to deterioration caused by the sun, ozone and other weather agents or chemicals normally found in the atmosphere.

The elasticity of the material allows for excellent flexibility even at low temperatures, which ensures mechanical and physical properties are maintained over time.


APPLICATION

- SOPRA TPE ROUND WALL OUTLET** is installed between two layers of SOPREMA bitumen membranes for long term performance of the system. To improve adhesion, a thin coat of primer can be applied on **SOPRA TPE ROUND WALL OUTLET** beforehand.

FOR COMPLETE INFORMATION ON PRODUCT INSTALLATION, PLEASE CONSULT YOUR SOPREMA REPRESENTATIVE.

PROPERTIES

SPECIFICATIONS	SOPRA TPE ROUND WALL OUTLET							
	Ø	B	C	D	E	F	G	PCS PER BOX
SOPRA TPE ROUND WALL OUTLET 80	80 mm	73 mm	76 mm	500 mm	130 mm	175 mm	304 mm	20
SOPRA TPE ROUND WALL OUTLET 100	100 mm	93 mm	84 mm	500 mm	130 mm	215 mm	304 mm	20

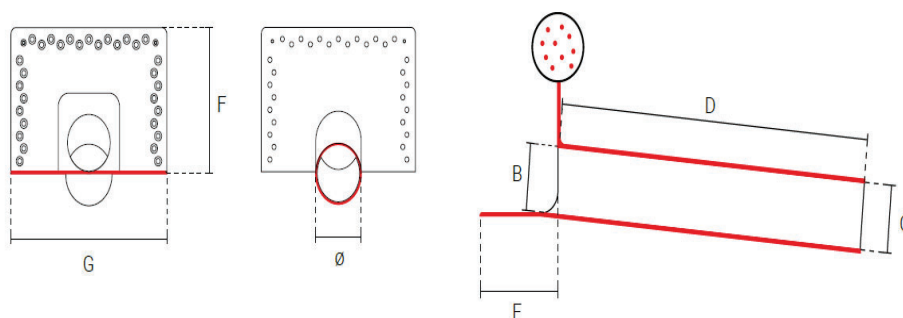

SOPREMA.COM.AU • +61 (3) 9221 6230

SOPRA TPE

ROUND WALL OUTLET

TECHNICAL DATA SHEET

ANZ-TDS-144-SOPRA TPE ROUND WALL OUTLET



ACCESSORY
PRODUCTS

APPLICATIONS

ROOFS

VISUAL



STORAGE AND HANDLING

If the products are stored outdoors, cover them with an opaque protection cover after removal of the delivery packaging.

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this publication is based on the present state of our best knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by Commonwealth or State Legislation. The owner, their representative and/or the contractor are responsible for checking the suitability of products for their intended use.